



# WALCOOM

Walcoom Corporation



# ANTI CLIMB SPIKES

[www.walcoom.com](http://www.walcoom.com)  
E-mail: [sales@walcoom.com](mailto:sales@walcoom.com)

## Anti Climb Spikes Are Widely Used on Walls, Fences and Gates



Anti climb spikes, also called spikes, which have galvanized and PVC coated surface are the good device for protecting people from damaging and losing properties.

Anti climb spikes can be divided into 3 types according to different structure features: wall spikes, razor channel spikes and razor spikes pipe.

Razor spikes are usually used to perimeter walls, security fences, fencing gates, building roofs and other public buildings isolation like schools, authorities and commercial organizations.

### Features

- Effective intrusion deterrent.
- Weather resistant.
- Anti-rust and anti-corrosion.
- Easy installation.
- Low cost.
- Robust and long service life.

### Specification

- **Specification of wall spikes:**
  - **Material:** low carbon steel plate and stainless steel plate.
  - **Types:** large wall spikes, medium wall spikes and small wall spikes.
  - **Surface treatment:** hot-dipped galvanized, electro galvanized and PVC coated.
  - **Thickness:** 0.8–2 mm.
  - **Length of strip:** 1–2.0 m.
  - **Hole size:** 7.5 mm.
  - **Color:** black, white, green, yellow, red, blue, brown(for PVC coating).

# ANTI CLIMB SPIKES






Black large wall spikes



White large wall spikes




**Table 1: Specification of Three Types of Wall Spikes**

Name	Pattern	Spike Height	Spike Spacing	Bottom Space
Large wall spikes		11 cm	8 cm	N/A
Medium wall spikes		Larger 10 cm Smaller 4 cm	13 cm	4.5 cm
Small wall spikes		6 cm	7 cm	3 cm

• **Specification of razor channel spikes:**

- **Material:** carbon steel plate and stainless steel plate.
- **Types:** U channel razor spikes, razor comb spikes and W channel razor spikes.
- **Thickness:** 2 mm.
- **Surface treatment:** hot-dip galvanized or PVC coated.
- **Hole size:** 10 mm.
- **Hole spacing:** 90 mm.

**Table 2: Specification of Three Types of Razor Channel Spikes**

Pattern	Spike Height (mm)	Bottom or Fixing Place Width (mm)	Length (m)	Other
<b>U Channel Razor Spikes</b>				
	Higher: 80 Lower: 40-50	50	1.5	Spikes spacing: 45 mm. Weight: 3.0 kg. Packing quantity: 10 pcs/box.
<b>Razor Comb Spikes</b>				
	30	40v	1.8	N/A
<b>W Channel Razor Spikes</b>				
	Higher: 50-80 Lower: 30-40	50	1.8	Spikes spacing: 45 mm. Weight: 4.0 kg. Packing quantity: 10 pcs/box

# ANTI CLIMB SPIKES

- **Specification of razor spikes pipe:**

- **Material:** carbon steel plate or stainless steel plate.
- **Surface treatment:** galvanized and PVC coated.
- **Thickness:** 1.3 mm (0.5 mm – 2 mm).
- **Length:** 50 cm.
- **Pipe diameter:** 25 mm – 200 mm.
- **Color:** golden yellow, silver and white.
- **Packing:** strong carton or as customer's request.




Galvanized razor spikes pipe.



Stainless steel razor spikes pipe.

## Application

- Perimeter walls.
- Perimeter security fencing.
- Fencing gates.
- Building roofs.
- Residential and industrial buildings.
- Public buildings isolation like schools, local authorities and commercial organizations.

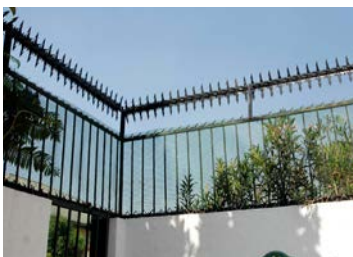

Wall spikes garden.



Fence spikes gate.




Anti climb spikes yard wall.



Medium wall spikes building wall.



Razor spikes pipe school building.

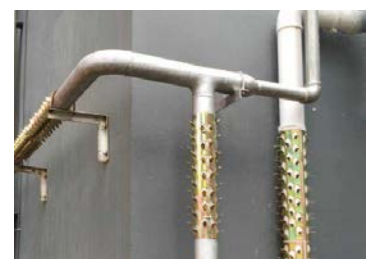

Razor spikes pipes residential building.

# ANTI CLIMB SPIKES

Walcoom Corporation



Add: No. 3481, Yongxing Road, Hengshui City, Hebei Province, China.  
Tel: +86-15030811699  
Skype: wiremesh@live.com  
E-mail: sales@walcoom.com  
Web: <http://www.walcoom.com>

